


Loops and needles for perfect inoculation.



NEW Platinum Microloop®



Microloops

Microloops[®]

A range of loops and accessories for perfect inoculation





MW&E offer a comprehensive range of inoculating loops.

Decades of experience in the manufacture of precision inoculating loops ensures that you can rely on Microloops for accurate volumetric technique every time.


Microloop®

A wide range of premium quality, accurately sized twisted Nichrome 5 wire loops, available in 6 volumetric sizes. Nichrome wire offers all the benefits of platinum without the cost. Even accurately formed loops glide smoothly across the agar surface producing good isolated colonies.

- Rapid Cooling
- Consistent and reproducible results

Calibrated 1-8

 Accurately calibrated with Evans Blue dye test³⁵⁸



1μl and 10μl



Plastic Microloop®

Premium quality sterile plastic disposable inoculating loops and needles. Precision moulded to ensure smooth edges that avoid tearing and gouging of agar. Available sterile in individual peel pouch or tamper-evident resealable bags of twenty.

- Three convenient sizes plus a needle
- Colour coded for instant size identification
- Tamper evident packs ensure sterility

Microloop® Holders

Designed for use with MW&E Microloops. The holders are made from high quality brass with well insulated handles. Durable and long lasting yet light enough for repetitive use.

- Extremely Robust
- Choice of three sizes
- Insulated handle

Microstreaker®

Combined twisted nichrome wire loops and light weight, insulated aluminium holders, perfectly balanced for easy manipulation.

Microstreakers glide smoothly across the surface of agar without tearing or gouging.

- Colour coded for instant size identification
- Rapid Cooling

Calibrated 1-8

- Accurately calibrated with Evans Blue dye test³⁵⁸
- Certificate of Calibration supplied with each Microloop
- 1μl and 10μl


Microloop® Calibration Gauge

The use of a calibration gauge in the laboratory maintains standards and gives peace of mind. The simple to use gauge is a quick and effective way to ensure your loops are within specification. UKAS certificate available upon request.

- Go No-Go gauge for guaranteed calibration
- Simple to use
- 1μl and 10μl
- Robust construction



MEDICAL WIRE A FOLIEMENT COUTD.

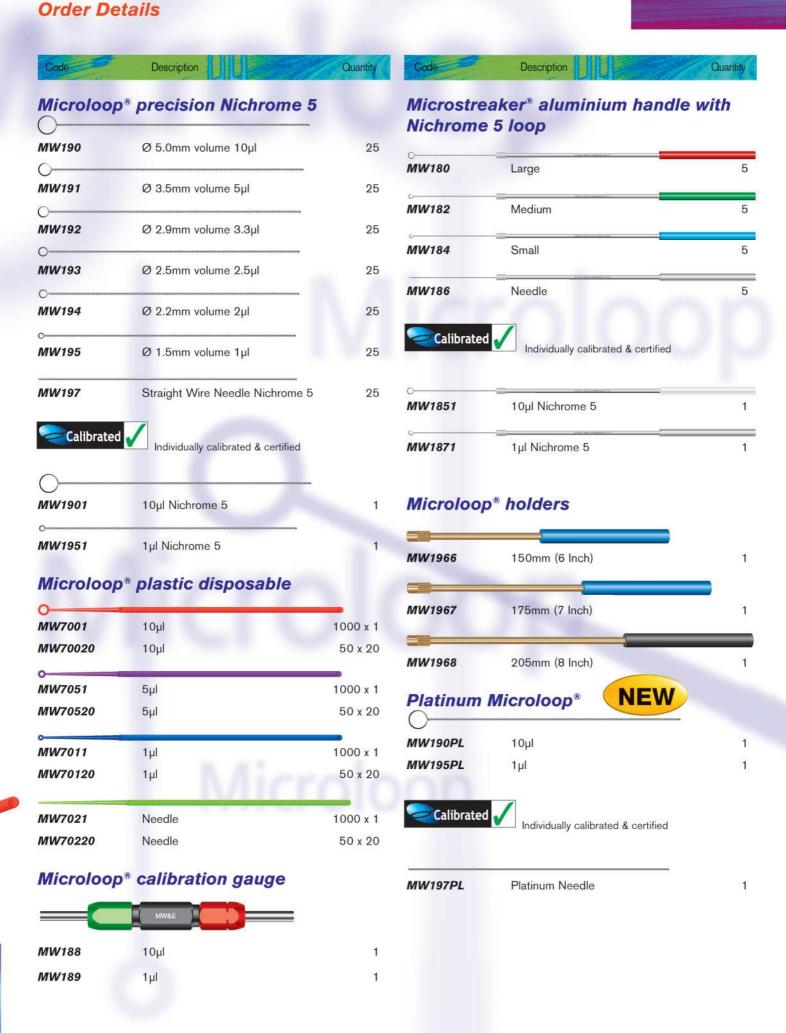






Calibration of Microloop® and Microstreaker® is carried out by the Evans Blue dye method 358 as recommended by the American Society for Microbiology.



Precision manufacturing

The MW&E manufacturing process ensures a perfectly symmetrical loop with equal dimensions, not an uneven oval. This allows the use of our gauge for future calibration once we have certified the loop.





Microloop

low cost loop

References

- Reisner B.S., G.L. Woods, R.B. Thomson Jr, D.H. Larone L.S. Garcia and R.Y. Shimizu, 1999, Specimen Processing, p75-76, in Manual of Clinical Microbiology, 7th Ed., American Society for Microbiology, Washington, D.C.
- 2 Clarridge J.E., J.R. Johnson and M.T. Pezzlo. 1998. Cumitech 2B, Laboratory Diagnosis of Urinary Tract Infections. Coordinating ed., A.S. Weissfeld, American Society for Microbiology, Washington, D.C.
- 3 Isenburg H. (Editor in Chief), 1992. Pipetters and Calibrated Loops, 12.17 in Clinical Microbiology Procedures Handbook. American Society for Microbiology, Washington, D.C.
- 4 Steiner P. 1989. Basic laboratory principles and calculations, p.16 In L.A. Kaplan and A.J. Pesce (ed.) Clinical Chemistry, 2nd ed. The C.V. Mosby Co., St. Louis.
- 5 Clarridge J.E., M.T. Pezzlo and K.L. Vosti, 1987. Cumitech 2A, Laboratory Diagnosis of Urinary Tract Infections. Coordinating ed., A.S. Weissfeld, American Society for Microbiology, Washington, D.C.
- 6 NCCLS. 1984. Determinating performance of volumetric equipment. Proposed guideline. NCCLS document 18-P. NCCLS, Villanova, Pa
- 7 Albers A.C. and R.D. Fletcher. 1983. Accuracy of calibrated-loop Transfer. J. Clin. Microbiol. 18:40-42.
- 8 Barry. A. L., P. Byrd Smith, and M. Turck, 1975. Cumitech 2, Laboratory Diagnosis of Urinary Tract Infections. Coordinating ed., T. L. Gavan, American Society for Microbiology, Washington, D.C.



MW&E Microloop® made from Nichrome 5®

Nichrome 5ⁿ is an alloy of 80% Nickle and 20% Chromium and has long been regarded as the finest alloy of its type for repeated heating. It gives outstanding performance at temperatures up to 1200°c.

Plastic Microloop packaging

Tamper evident bag with tear seal top and resealable opening.



GUARANTEED STERILITY: TAMPER-EVIDENT SEAL TO ENSURE STERILITY EVERY TIME.

Dealer stamp

Advantage Bundling SP / MW&E 2228 Page Road, #103 Durham, NC 27703 1-866-BUNDLING (1-866-286-3546) www.advantagebundlingsp.com

